


E-LITE semicon

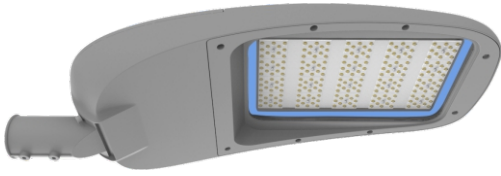

Phantom™


Cobra Head LED Area & Roadway Lighting

30W~200W


	EO-STPT-30	EO-STPT-60	EO-STPT-90	EO-STPT-120	EO-STPT-150	EO-STPT-200
Power	30W	60W	90W	120W	150W	200W
Fixture Efficacy	135LPW	135LPW	135LPW	135LPW	135LPW	135LPW
Total Lumen	4,050lm	8,100lm	12,150lm	16,200lm	20,250lm	27,000lm
CCT	4500~5500K (Standard) / 2500~5500K (Optional)					
CRI	≥70					
Lumen Maintenance	L70>100,000 hours / TM-21 Calculated					
Voltage	100-277 VAC / 277-480 VAC					
Surge Protection	6KV / 20KV					
Power Factor	0.95 minimum					
IP & IK Rating	IP66 & IK09					
Operating Temp	-30°C ~ 45°C / -22°F ~ 113°F					
Humidity	15% to 95% RH					
Warranty	5 Years					
Fixture Material	Aluminum Alloy					
LED Chip	Philips Lumileds					
Dimension	520x212x90mm	520x212x90mm	616x259x186mm	677x305x187mm	677x305x187mm	850x366x198mm
Net Weight	4.0kg	5.5kg	5.5kg	7.5kg	7.5kg	11.5kg
Certification	cETLus / DLC Premium / CE / RoHS					

Photometrics

70 x 140° (TYPE II-S)




0.0~180.0
90.0~270.0




Mount Height(m): 6

90 x 145° (TYPE II-S)




0.0~180.0
90.0~270.0




Mount Height(m): 5


70 x 150° (TYPE II-M)



0.0~180.0
90.0~270.0





Mount Height(m): 6

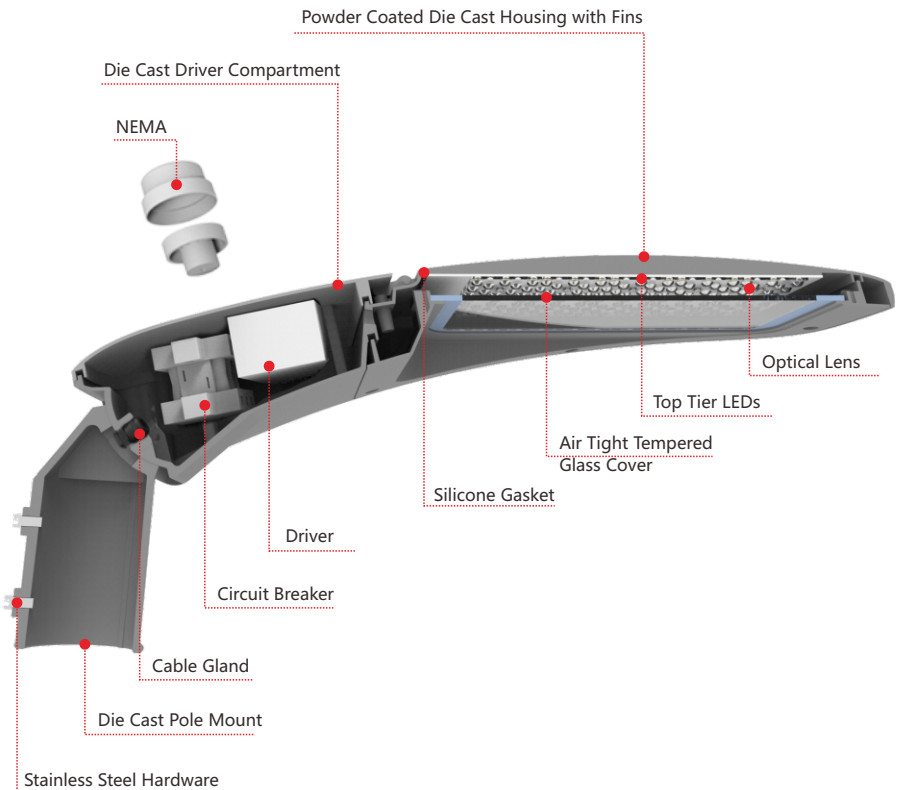

E-LITE semicon

Accessories

Image	Applicable Power	Product Code	Product Description
	30W~200W	SP-SF	Slip Fitter

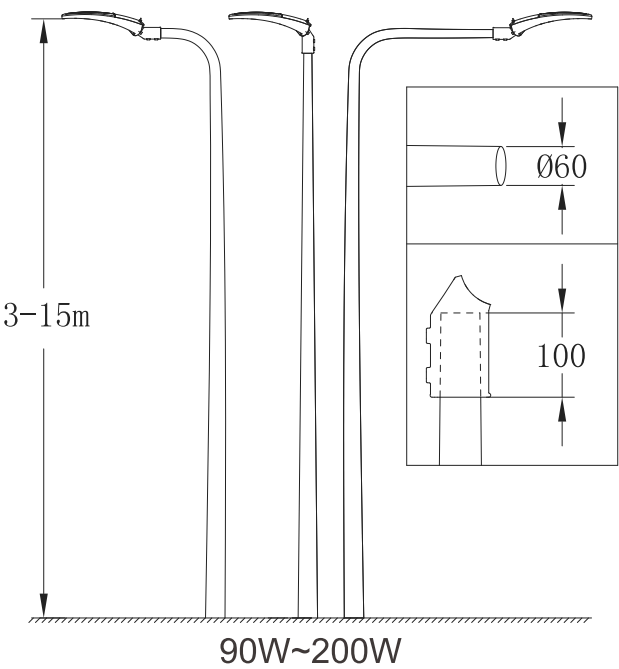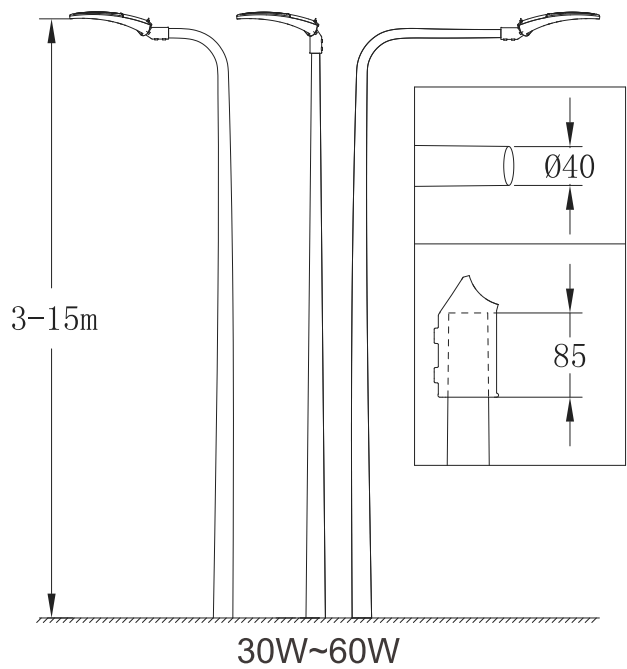

Ordering Information

