
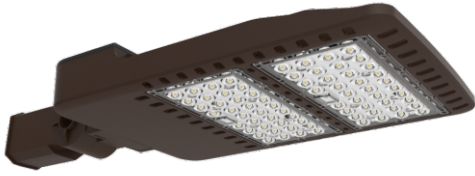


E-LITE semicon**Orion™****LED Area & Roadway Lighting****50W~300W**


	EO-ARORN-50	EO-ARORN-100	EO-ARORN-150	EO-ARORN-200	EO-ARORN-240	EO-ARORN-300
Power	50W	100W	150W	200W	240W	300W
Fixture Efficacy	150lm/W	145lm/W	130lm/W	145lm/W	150lm/W	145lm/W
Total Lumen	7,500lm	14,500lm	19,500lm	29,000lm	36,000lm	43,500lm
CCT	4500~5500K (Standard) / 2500~5500K (Optional)					
CRI	≥70					
Lumen Maintenance	L70>100,000 hours / TM-21 Calculated					
Voltage	100-277 VAC / 200-480 VAC					
Surge Protection	10KV / 20KV					
Power Factor	0.95 minimum					
IP Rating	IP66					
Operating Temp	-30°C ~ 50°C / -22°F ~ 122°F					
Humidity	15% to 95% RH					
Warranty	5 Years					
Fixture Material	Aluminum Alloy					
LED Chip	Philips Lumileds					
Dimension	485x300x75mm	485x300x75mm	485x300x75mm	620x300x75mm	790x300x75mm	790x300x75mm
Net Weight	4.5kg	4.5kg	4.5kg	5.9kg	8.4kg	8.4kg
Certification	cETLus / DLC Premium / CE / RoHS (Pending)					

Photometrics

100x155 DEGREE (Type III -S)

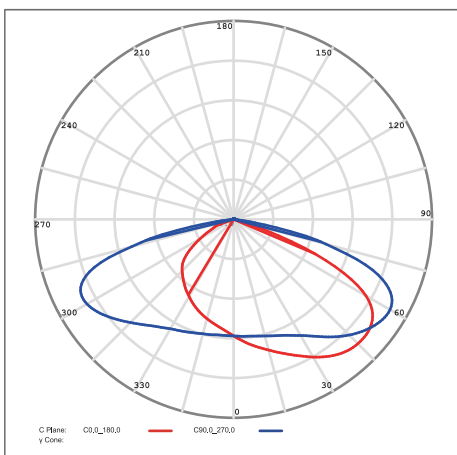



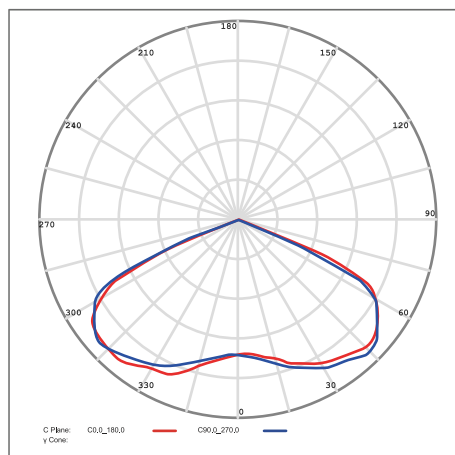

130 DEGREE (Type V -S)



E-LITE semicon

Accessories

Image	Product Code	Product Description
	SP-SA	Side Arm
	SP-SAA	Adapter(for Side Arm+Round pole)
	SP-SF	Slip Fitter
	SP-TR	Trunion

Ordering Information

