




LitePro™
LED Area & Roadway Lighting
with Graphene Heat Sink
100W~300W



	EL-ARGP-100	EL-ARGP-150T	EL-ARGP-200T	EL-ARGP-300T
Power	100W	150W	200W	300W
Fixture Efficacy	140LPW	140LPW	140LPW	140LPW
Total Lumen	14,000lm	21,000lm	28,000lm	42,000lm
CCT	4500~5500K (Standard) / 2500~5500K (Optional)			
CRI	≥70			
Lumen Maintenance	L70>100,000 hours / TM-21 Calculated			
Voltage	100-277 VAC			
Surge Protection	10~12KV / 20KV			
Power Factor	0.95 minimum			
IP Rating	IP66			
Operating Temp	-30°C ~ 45°C / -22°F~ 113°F			
Humidity	15% to 95% RH			
Warranty	5 Years			
Fixture Material	Graphene Heat Sink			
LED Chip	Philips Lumileds / Cree			
Dimension	448x292x95mm	548x292x95mm	648x292x95mm	848x292x95mm
Net Weight	3.5kg	4.5kg	5.5kg	8.5kg
Certification	cETLus / DLC Premium / CE / RoHS			

Photometrics

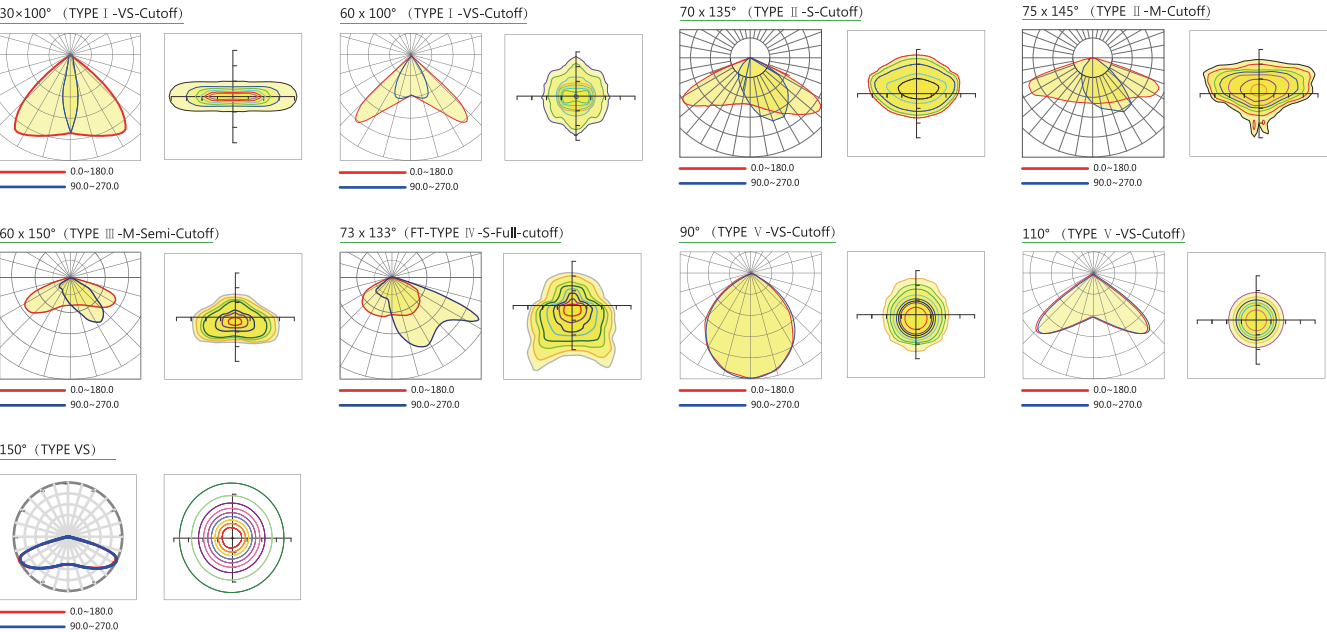

Accessories

Image	Applicable Power	Product Code	Product Description
	100W~300W	SP-SF	Slip Fitter
	100W~300W	SP-SA(A)	Straight Arm(A)
	100W~300W	SP-SA(B)	Straight Arm(B)
	100W~300W	SP-NEMA	NEMA

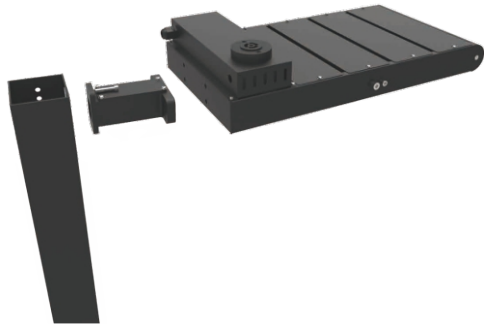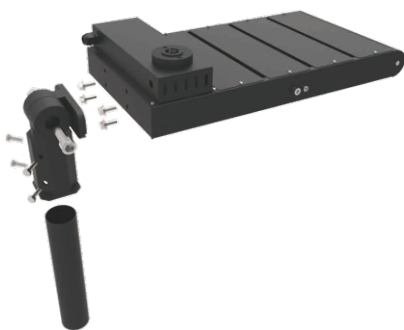

Ordering Information

